

IEC-10

10.1" Touch Panel PC

IEC-10A1



IEC-10

Slim and Compact Design

20.1 mm



Programmable Color LED Status Indicators easy to know space status



LED Status Indicator



Color Spectrum

IEC-10

PoE (Power Over Ethernet) easy for device deployment and installation



RJ45
(PoE Support)



Power Switch

Key-cards or employee ID cards can be scanned directly from the on-board NFC/RFID reader



IEC-10

Fixed 2MP
Front Camera

Front Camera

Available

Room A03

13:28

May, 11


Next

15:00 -

Anal
Elec

YUJI M

Wall Mount
Bracket

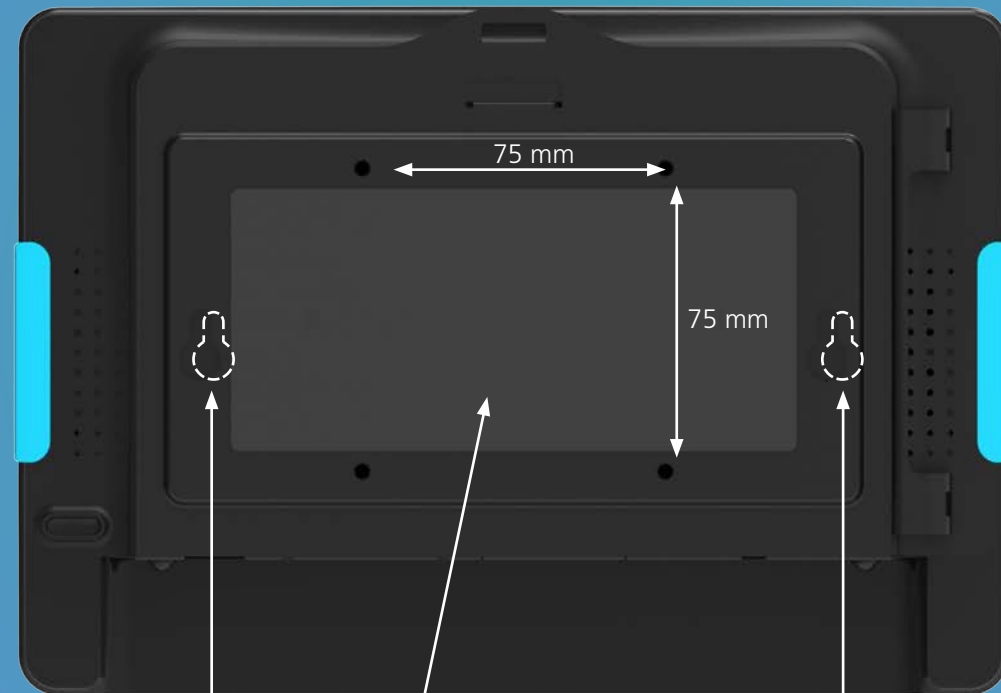


Keyhole Hanger

Adhesive Tape

Keyhole Hanger

Versatile Mounting Options Installs Anywhere

- VESA mount (75 x 75 mm) with key hold hangers supports
- Screw-free adhesive tape for smooth surfaces

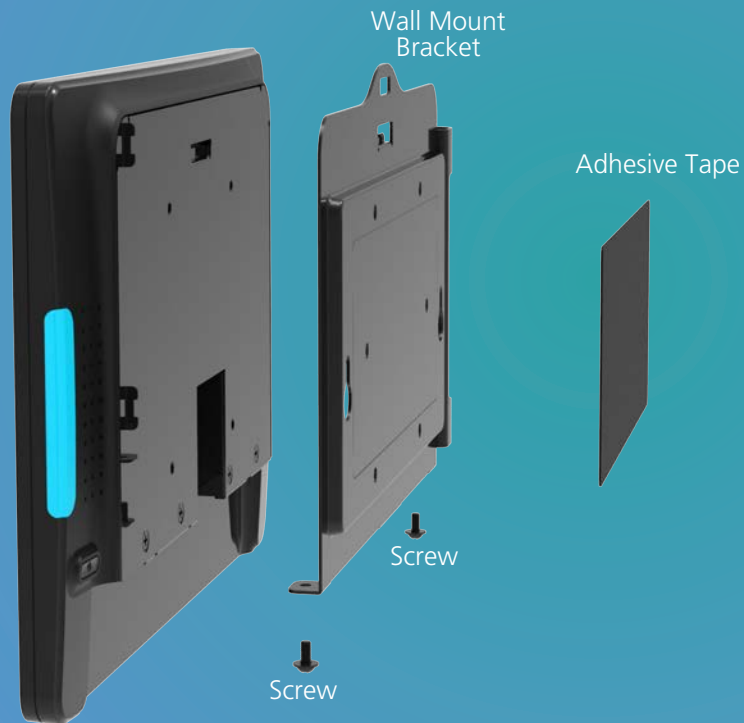

Ideal for Office Managements



Smart and Simple Management Assistant

IEC-10 can be your smart office meeting room assistant that help you manage meeting, scheduling/reservation, attendees, and access control.

The Screw-free adhesive tape and the Power over Ethernet (PoE) can easily install IEC-10 to any location with only one single cable without damaging surfaces.


Slim and style design with Programmable Color LED Indicators help colleagues understand the status of the meeting room without disturbing the meeting.

Specification

Model No.	IEC-10A1
Processor	Rockchip RK-3288, Quad-core Cortex-A17 up to 1.8GHz
GPU	Mali-T760 MP4
System Memory	2GB DDR3
Power Input	12V/2A Min 24W External Power Adaptor or PoE (Power Over Ethernet) selectable
Storage Device	16GB eMMC
Wi-Fi	802.11 a/b/g/n, 1T1R
Bluetooth	Bluetooth 4.0 (BLE support)
NFC / RFID	Optional
Touch LCD Display	
Size / Resolution	10.1 " TFT LCD / 1280 x 800
Contrast Ratio	1000:1
Brightness (Touch Type)	450 nits (No Touch), 382 nits (P-CAP)
View Angle	H:160°, V:160°
Touch Screen	Projected Capacitive Touch, 10 Points
Camera	
Front Camera	Fixed Focus 2M Pixel Front Camera
I/O Port	
USB Port	1 x USB 2.0 Type A, 1 x USB 2.0 Type C (OTG support)
LAN Port	1 x RJ45 Giga LAN, PoE (Power Over Ethernet) 48V/56V support
Video Port	1 x HDMI Type-C (Mini HDMI)
Power Input	1 x DC in 12V/2A 2 pin
SD Slot	1 x Micro SD Slot (SDHC 2.0 support)
OS Supported	
System	Android 8.1
Physical Properties	
Speaker	1 x 2W
Material	Plastic + Glass + SECC Metal
Housing Color	Dark Gray
Light Bar	2 x Multi-Color LED Light Bar
Dimensions (W x H x D) mm	247.4 mm x 170.5 mm x 25.7 mm
Net Weight (kg)	0.94 Kg
Gross Weight (kg)	TBD
Carton (W x H x D) mm	320 mm x 265 mm x 87 mm
VESA	75 mm x 75 mm
Safety	
Certifications	CE, FCC, LVD, RoHs
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing

* Specifications and features are for reference only and are subject to change without prior notice.

Interfaces

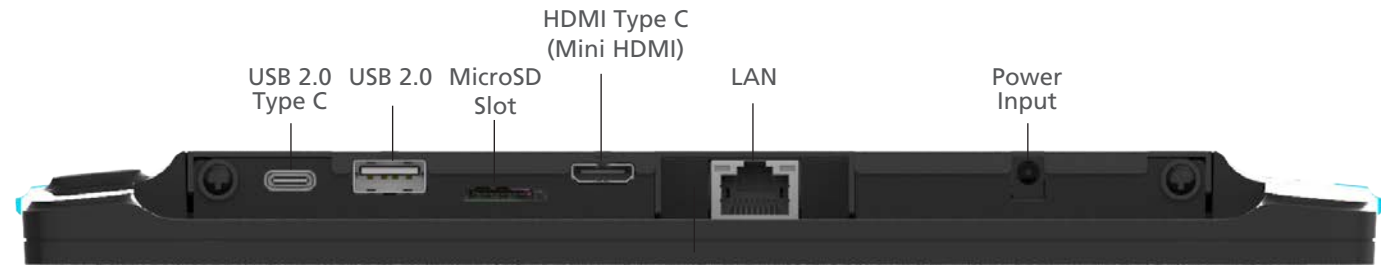

Dimensions

IEC-10A1

